



**MOTORCYCLE**

## RIGID L-PLATES + FORK BRACKETS (10 PACK) INSTRUCTIONS

Please read instructions carefully and retain for future reference. Failure to follow the instructions in this guide may result in damage of the motorcycle and / or personal injury.

**Warning:** Ensure the L-Plate and fork brackets do not interfere with any components or controls. Check periodically that the L-Plate and brackets are tightened securely.

This pack contains rigid L-plates which can be attached to vehicles by adhesive tape or cable ties. This pack also contains fork brackets which can be used to fit L-Plates to the front forks of most motorcycles & scooters.




Product Code: **LPT04**

### PRODUCT CONTENTS

1. Rigid L-Plate (10pc)
2. Fork Bracket (10pc)
3. L-Plate nuts & bolts (20pc)

1.



2.




3.



### TOOLS REQUIRED FOR FITTING

1. Drill
2. 6mm drill bit
3. 10mm spanner
4. 8mm spanner
5. flat head screw driver

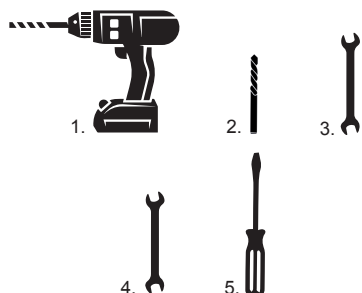

### STEP 2

Insert a white L-Plate bolt through each hole and fork bracket (as shown below).



### STEP 4

Remove the silver bolts and nuts from the brackets, locate the brackets over the front right fork of the vehicle, reinsert the bolts and tighten off the nuts using a 8mm spanner and making sure not to over tighten.



### STEP 1 - FITTING

Drill 2 x 6mm holes along the right side of the L-Plate (as shown below).



### STEP 3

Tighten the white nut over each L-Plate bolt thread using a 10mm spanner. Cut off excess length of bolt thread if needed (as shown below).

