



## LUGGAGE TOP BOX INSTRUCTIONS

Please read instructions carefully and retain for future reference. Failure to follow the instructions in this guide may result in damage to the product or motorcycle and / or personal injury.

This luggage box is designed for carrying and storage of everyday personal items, caution should be made to avoid over-loading the top box which may result in abnormal handling of the motorcycle / scooter. It should only be used at road legal speeds.




The top box uses a universal fitting plate which must be fitted to a carrier on the motorcycle / scooter of sufficient strength to support the top box. It is the user's responsibility to ensure the top box and fitting plate is routinely inspected after fitment, to ensure it is secure and stable.

Product Code: **LUGBOX11**




### WHAT'S IN THE BOX

1. Top box (1pc)
2. Fitting plate (1pc)
3. Bottom stay brackets (4pc)
4. Square washer (4pc)
5. Round washer (4pc)
6. Bolts & nuts (4pc)
7. Anchor bolt & washer (1pc)
8. Keys (2pc)



### FITMENT DIAGRAM

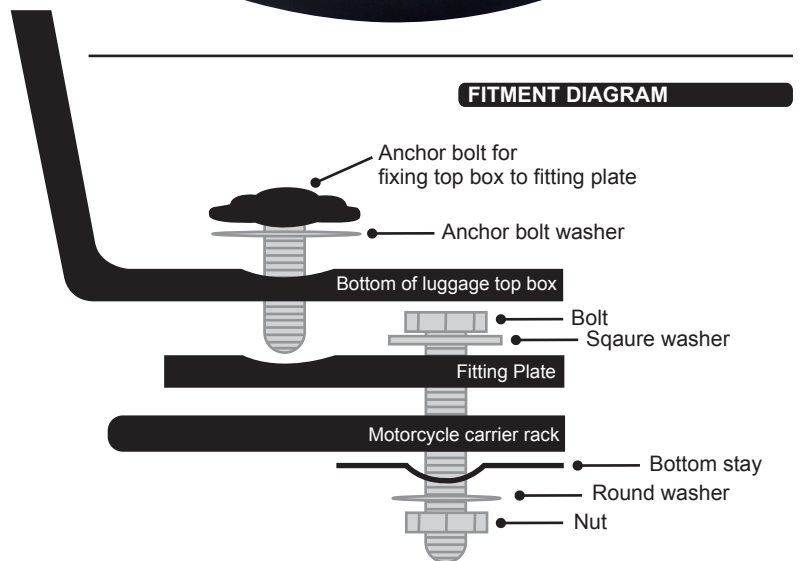

### FITMENT

Place the fitting plate on top of the motorcycle's carrier rack, with the raised edge facing forwards.

Then place the four bottom stay brackets under the carrier-rack, and secure to the fitting plate using the bolts washers and nuts.

The carrier-rack should be between the fitting-plate and bottom stay brackets (see diagram above)

Adjust the position of the fitting plate so that it is located uniformly and then tighten the bolts and nuts further.

Place the top box onto the fitting plate, ensuring to engage the back of the base into the raised front edge of the fitting plate.

Open the top box lid, insert the anchor bolt and washer through the hole in the base and tighten into the fitting plate.

### IMPORTANT INFO

Due to the anti-tamper internal anchor bolt fitting, the top box can be left on the motorcycle when not in use. Alternatively, it can be removed simply by unscrewing the anchor bolt and lifting the box off the fitting-plate.

### WARNING

The top box features a spring-activated self-locking mechanism. When the lid is closed the box is automatically locked. It is opened simply by using the keys provided. **TAKE CARE NOT TO SHUT THE KEY IN THE TOP BOX!**